


# MESH DECK DATASHEET

## B287 - Rackman Mesh Deck 1250mm x 1220mm (50x100) - 1000kg UDL

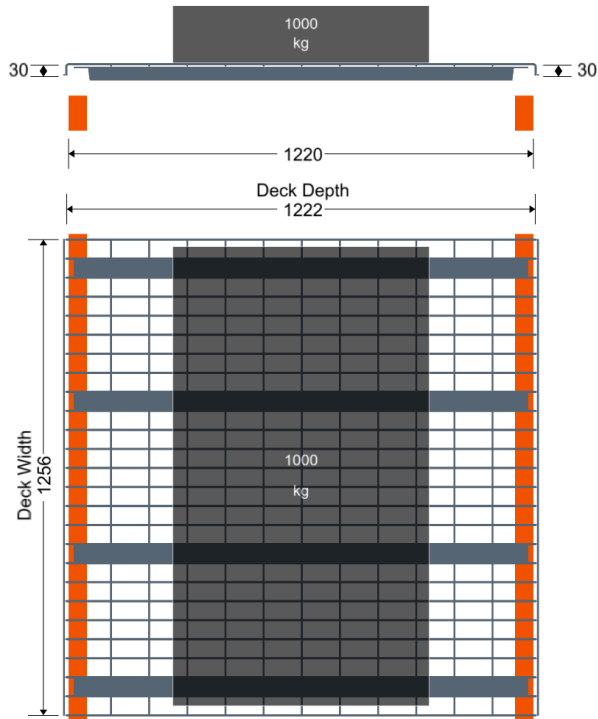

**1000kg**  
UDL

**2000kg**  
Load @ Failure

**7.4mm**  
Deflection @ 1000kg

**>70%**  
Open Area

### Performance - ANSI MH 26.2 - 2017 Independent of the rack beams

Rated @ UDL (kg)	1000
Deflection @ UDL (mm)	7.4
Structure Fail (kg)	2000

### Specifications

Beam Type	BOX 50	BOX 50
Rack Depth (mm)	1220	
Deck Depth (mm)	1222	
Deck Width (mm)	1256	
Top Wire Pitch (mm)	50	
Bottom Wire Pitch (mm)	100	
Top Wire Ø (mm)	6	
Bottom Wire Ø (mm)	5	
Support Thickness (mm)	1.9	
Number of Supports	4	
Finish	Pre-Galvanised	
Weight (kg)	16.15	

### Features

- Compliant with ANSI MH 26.2 - 2017
- Made in Australia
- Pre-welded support channels
- SafeEDGE® to mesh and channels
- Mesh has greater than 70% open area
- AU Design Registration No. 143675 applies

### End 1

Waterfall (mm)	30
Fold Type	External
Fold Direction	Down
Extension (mm)	0

### End 2

Waterfall (mm)	30
Fold Type	External
Fold Direction	Down
Extension (mm)	0